

# data SHEET



## 5-Port BAS Switch Ethernet Built for Buildings

An expanding need exists for Ethernet switches in many Building Automation Systems (BAS). The 5-port Plug-and-Play (PnP) BAS Switch is ideal for low-cost 10/100 Mbps Ethernet switching applications where equipment is mounted in shallow-depth control cabinets.

No configuration is needed. Each port automatically sets its data rate and duplex using the Auto-negotiation protocol. Communication matches the capability of the link partner: either 10 Mbps or 100 Mbps and either half- or full-duplex. Each port adapts to either a straight-through or crossover cable using the Auto-MDIX protocol. There is no need to stock crossover cables for switch-to-switch cabling.

Each unit is housed in a rugged metal enclosure and can be either panel or DIN-rail mounted. A writable label allows listing the location of field devices connected to each port.

The half-wave rectified low-voltage power supply allows sharing 24 VAC/VDC with other devices. LEDs for data rate and activity aid in troubleshooting.

Unlike office-grade Ethernet equipment which is not adaptable to control panels, the BAS Switch makes an Ethernet installation neat, professional, and dependable.


### Simple to Install and Use ...

- DIN-rail and panel-mountable versions
- Auto-MDIX and auto-negotiated communication
- Industrial temperatures: 0°C to +60°C
- 10BASE-T/100BASE-TX compliant
- Industrial environment EMC compatible
- UL 508 Listed, Industrial Control Equipment
- CE Mark and RoHS compliant
- Diagnostic LEDs
- 10–36 VDC and 24 VAC (± 10%) 47–63 Hz
- Power through a quick-disconnect terminal strip
- Writable label for listing connected devices




CTRLink®

Mechanical Drawings

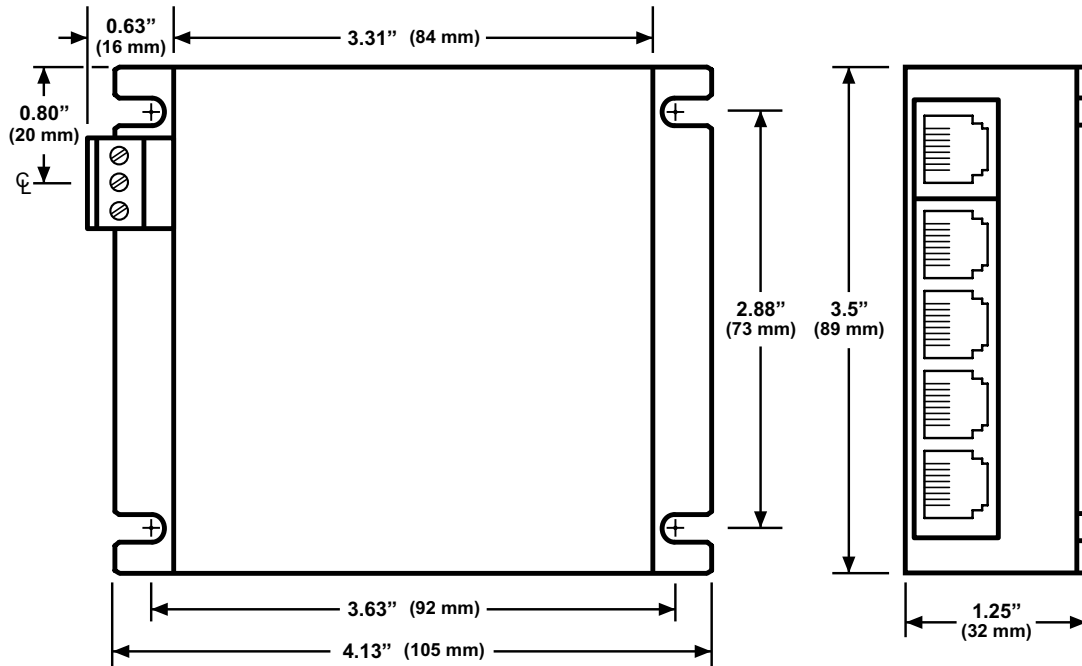

EIBA5-100T Panel Mount

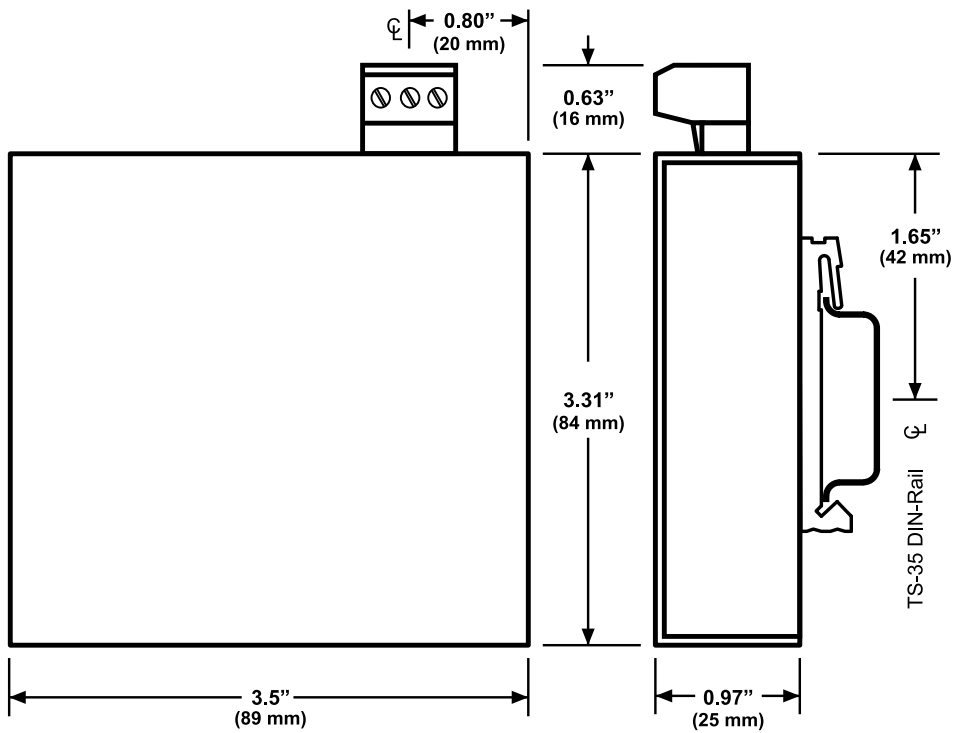

EIBA5-100T/R Din-rail Mount


## Specifications

<b>Power Requirements</b>	10–36 VDC 3 W or 24 VAC ±10% 6 VA 47–63 Hz
<b>Operating Temperature</b>	0°C to 60°C
<b>Storage Temperature</b>	–40°C to 85°C
<b>Relative Humidity</b>	10–95%, non-condensing
<b>Protection</b>	IP30
<b>Mounting</b>	TS-35 DIN-rail
<b>Shipping Weight</b>	1 lb (0.45 kg)
<b>Ethernet Communications</b>	IEEE 802.3 10/100 Mbps data rate using RJ-45 connectors, 100 m (max)
<b>LEDs</b>	Power                      Green = power OK Port LEDs                Green = 100 Mbps communication established Yellow = 10 Mbps communication established Flashing = data transmissions occurring
<b>Regulatory Compliance</b>	CE Mark; CFR 47, Part 15 Class A; RoHS; UL 508 Industrial Control Equipment



## RJ-45 Connector Pin Assignments


Pin	Function
1	TD+
2	TD–
3	RD+
4	Not Used
5	Not Used
6	RD–
7	Not Used
8	Not Used




## Power Considerations

Applied voltage must be in the specified range and deliver a current commensurate with power consumption. The recommended size for solid power conductors is 16–20 AWG; and for stranded conductors use 16–18 AWG. Zero volts (COM) is isolated from chassis (earth). Input connections are reverse-polarity protected.


Connecting chassis to earth or using a backup source is always optional.

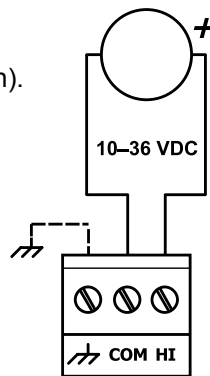

DC Powered


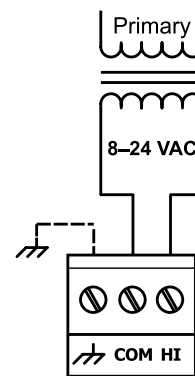


AC Powered

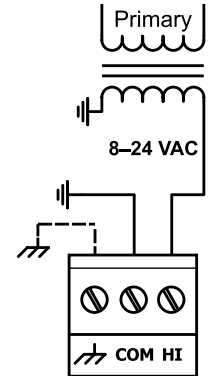

AC Powered with Grounded Secondary

## Typical Switch Installations

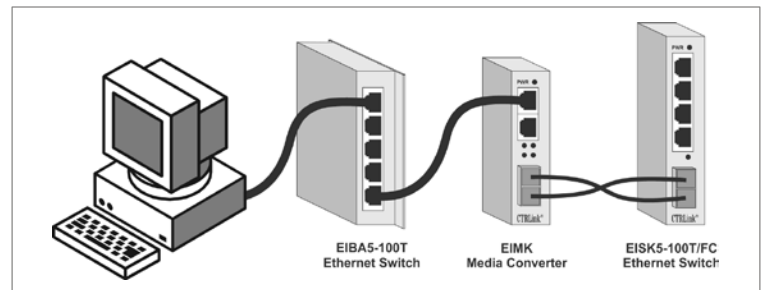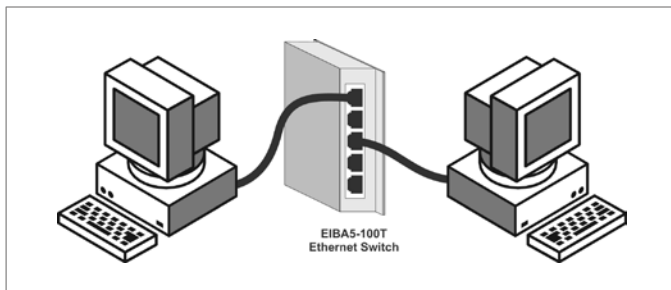

## Ordering Information

Model	Description
EIBA5-100T	5-Port 10/100Mbps Panel Mount BAS Switch Five-port
EIBA5-100T/R	5-Port 10/100Mbps DIN-rail Mount BAS Switch

## Accessories

Model	Description
AI-XFMR	Wall-mount plug-in transformer, 120 VAC input/24 VAC output (nominal values)
AI-XFMR-E	Wall-mount plug-in transformer, 230 VAC input/24 VAC output (nominal values)

### United States

Contemporary Control Systems, Inc.  
2431 Curtiss Street  
Downers Grove, IL 60515  
USA

Tel: +1 630 963 7070  
Fax: +1 630 963 0109

[info@ccontrols.com](mailto:info@ccontrols.com)  
[www.ccontrols.com](http://www.ccontrols.com)

### China

Contemporary Controls (Suzhou) Co. Ltd  
11 Huoju Road  
Science & Technology Industrial Park  
New District, Suzhou  
PR China 215009

Tel: +86 512 68095866  
Fax: +86 512 68093760

[info@ccontrols.com.cn](mailto:info@ccontrols.com.cn)  
[www.ccontrols.asia](http://www.ccontrols.asia)

### United Kingdom

Contemporary Controls Ltd  
14 Bow Court  
Fletchworth Gate  
Coventry CV5 6SP  
United Kingdom

Tel: +44 (0)24 7641 3786  
Fax: +44 (0)24 7641 3923

[ccl.info@ccontrols.com](mailto:ccl.info@ccontrols.com)  
[www.ccontrols.eu](http://www.ccontrols.eu)

### Germany

Contemporary Controls GmbH  
Fuggerstraße 1 B  
04158 Leipzig  
Germany

Tel: +49 341 520359 0  
Fax: +49 341 520359 16

[ccg.info@ccontrols.com](mailto:ccg.info@ccontrols.com)  
[www.ccontrols.eu](http://www.ccontrols.eu)